

SL112

Coaxial Spot Light



- 4i) Designed to replace fiber optic light sources in coaxial microscopes
- 4i) Compact light head provides efficient thermal management to promote long LED life.

Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks


SL112-WHIIC

Configured with the inline current source.

Spectral wavelength	Optional power compatibility	Alternative Connector
SL112 - XXX	XX	XXX
(blue) 470	IC	M12* (male)
(green) 530	IS	
(amber) 590	C2	
(red) 625	C3	
(white) WHI	C5	

IC = iCS (requires 24v power supply)
 IS = ISU (requires 24v power supply)
 C2 = Ai Connector
 C3 = Pulsar 710 Connector
 C5 = Pulsar 320 Connector
 ★ Available with IC and IS options only

Dimensional Information

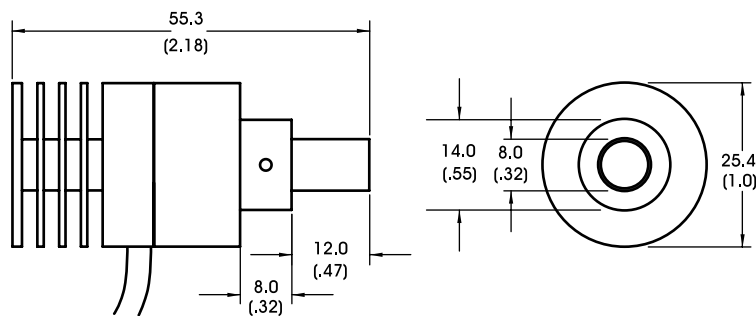

[Click for Installation Models & Drawings](#)

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@24	500	500	500	500	500	500	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C